



Tool Makers Vice

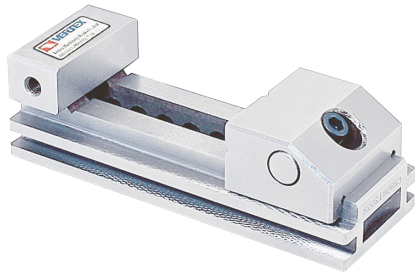


- Material:SKS2
- Hardness:HRC 58°-60°
- Squareness:Within 0.005m/m




| ORDER NO. | A | B | C | D | E | F | G | H | I | J | N.W (kgs) | CODE NO. |
|-----------|-----|----|----|----|----|----|----|----|----|-----|-----------|----------|
| VC20 | 135 | 48 | 42 | 20 | 22 | 23 | 62 | 40 | M6 | 5x7 | 1.3 | 2003-070 |
| VC25 | 160 | 70 | 62 | 30 | 32 | 33 | 80 | 45 | M6 | 8x7 | 3.6 | 2003-071 |
| VC30 | 175 | 73 | 65 | 32 | 33 | 35 | 95 | 45 | M6 | 8X7 | 4 | 2003-072 |

Tool Makers Vice

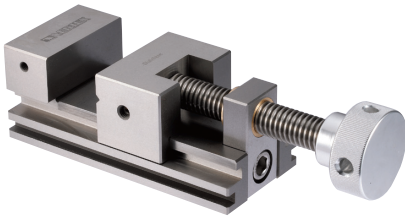

- Material:SKS2
- Hardness:HRC 54°±2°
- Squareness:Within 0.005m/m




| ORDER NO. | A | B | C | D | E | F | G | H | I | J | N.W (kgs) | CODE NO. |
|-----------|-----|----|----|----|----|----|----|----|----|-------|-----------|----------|
| V-VE20 | 90 | 60 | 50 | 23 | 27 | 25 | 32 | 30 | M5 | 6x6 | 1.62 | 2003-080 |
| V-VE25 | 160 | 70 | 62 | 28 | 34 | 33 | 80 | 45 | M6 | 7.5x7 | 4.02 | 2003-081 |
| V-VE30 | 175 | 73 | 65 | 30 | 35 | 35 | 93 | 45 | M6 | 7.5x7 | 4.7 | 2003-082 |


Precision Sine Vice

ORDER NO.SVC-100 CODE NO.2003-090

THE CLAMP HANDLE IS PLACED UNDER WORK PIECE.

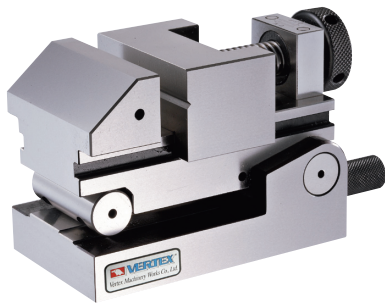

HARDENESS HRC 60°, SKS3
PARALLELISM 0.003/100mm
SQUARENESS 0.005/100mm

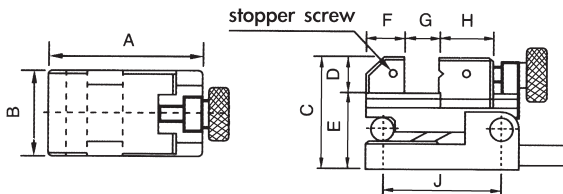

| | Unit:mm |
|-------------|---------|
| A | 130 |
| B | 70 |
| C | 93 |
| D | 30 |
| E | 63 |
| F | 33 |
| G | 45 |
| H | 45 |
| I | M5 |
| J | 100 |
| Max.angle | 46° |
| Weight(kgs) | 5.5 |


Precision Sine Vice

ORDER NO.SVL-50 CODE NO.2003-100

HORIZONTAL WAY



HARDENESS HRC 60°, SKS3
PARALLELISM 0.003/100mm
SQUARENESS 0.005/100mm



| | Unit:mm |
|-------------|---------|
| A | 160 |
| B | 73 |
| C | 93 |
| D | 30 |
| E | 63 |
| F | 33 |
| G | 80 |
| H | 45 |
| I | M5 |
| Max.angle | 46° |
| Weight(kgs) | 6.6 |


Two Way Vice

ORDER NO.SVS-100 CODE NO.2003-110

2 WAYS



HARDENESS HRC 60°, SKS3
PARALLELISM 0.003/100mm
SQUARENESS 0.005/100mm



| | Unit:mm |
|-------------|---------|
| A | 160 |
| B | 73 |
| C | 124 |
| D | 30 |
| E | 94 |
| F | 33 |
| G | 80 |
| H | 45 |
| I | M5 |
| J | 100 |
| Max.angle | 46° |
| Weight(kgs) | 8.3 |